

## FO4698

### *Low Cost Fiber Optic Rotary Joint*


#### **Description**

The FO4698 is a Moog Components Group entry-level single channel fiber optic rotary joint. This part offers good optical loss performance at an affordable price. The unit is very compact in size and features direct ST connection. The unit will work with both multimode and singlemode fibers.

The FO4698 fiber optic rotary joint must be used with ST style fiber optic connectors with ceramic ferrules. Length of the ferrule cannot exceed the dimension shown below. Use of other type and / or length ferrules will degrade performance and could destroy the part.

#### **Features**

- Provides rotary coupling for fiber link
- No collimating lens used
- Quick and easy hook-up to ST
- Completely bidirectional



#### **Typical Applications**

- Security systems
- Medical systems
- Other clean environments
- Robotics

#### **Kontakt: Schweiz und Fürstentum Liechtenstein**

##### **Peromatic GmbH**

Gubelstrasse 28 CH-8050 Zürich  
rue Confédération 29 CH-2300 La Chaux-de-Fonds  
info@peromatic.ch www.peromatic.ch

Fon +41-(0)43 300 60 60 Fax +41-(0)43 300 60 79  
Fon +41-(0)32 927 37 20 Fax +41-(0)32 927 37 22

# Fiber Optic Rotary Joint (FORJ)

Specifications		
Insertion Loss*	MAX dB	Variation dB
Fiber Size (Microns): 50 / 125	4	2
62.5 / 125	3	1
9 / 125	4	1
Side Loading	1 pound maximum (continuous)	
Sealing	None	
Rotation Rate	100 rpm	
Operating Temperature	- 55° C to + 60° C	
Life	One million revolutions	

\* Loss values are for Moog Components Group terminated cable assemblies

## Notes:

1. Hard mount one side only. **Hard mounting both sides will destroy the bearings.**
2. Modifications to the basic design are possible to alter or enhance operating characteristics. Consult factory for specific applications.


All dimensions are in inches and tolerances are:

.xxx=+.005


.xx=+.01

## Application Notice:

The FO4698 fiber optic rotary joint must be used with ST style fiber optic connectors with ceramic ferrules. Length of the ferrule cannot exceed the dimension shown below. Use of other type and/or length ferrules will degrade performance and could destroy the part.



## ST Style

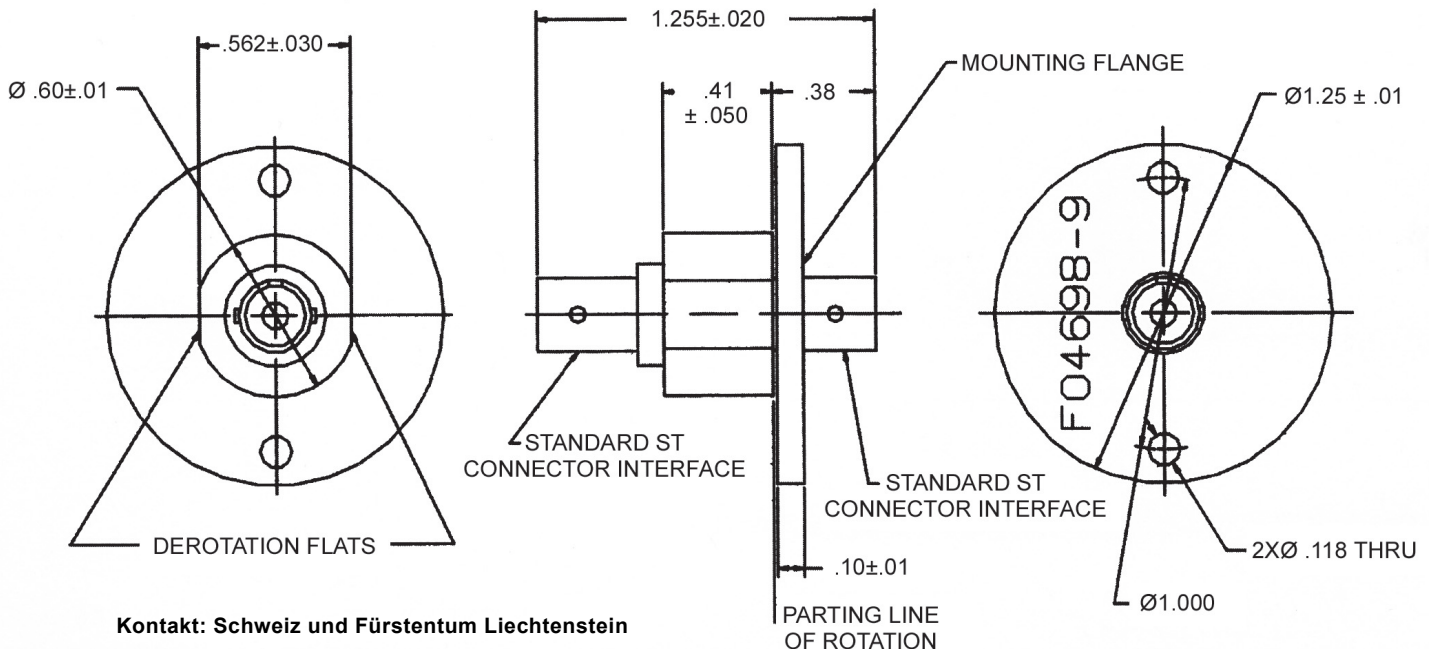

Kontakt: Schweiz und Fürstentum Liechtenstein

Peromatic GmbH

Gubelstrasse 28  
rue Confédération 29  
info@peromatic.ch

CH-8050 Zürich  
CH-2300 La Chaux-de-Fonds  
www.peromatic.ch

Fon +41-(0)43 300 60 60  
Fon +41-(0)32 927 37 20

Fax +41-(0)43 300 60 79  
Fax +41-(0)32 927 37 22