

Slip Rings With Through-Bores

AC6438

1/2" Bore Miniature Slip Ring Capsule Family

Description

A slip ring capsule can be used in any electromechanical system that requires unrestrained, intermittent or continuous rotation while transferring power and / or data. A slip ring is also called a rotary electrical joint, collector, commutator or swivel. A slip ring can improve system performance by simplifying operations and eliminating damage prone wires.

The AC6438 provides an economical, readily available solution when a compact through bore configuration is required. This unit provides a 1/2" through-bore for routing of hydraulic or pneumatic lines, and a compact 2.1" outside diameter and a very short overall length for minimal space applications. The AC6438 provides 5 amp circuits in 6, 12, 18 and 24 ring configurations. Similar in design to our very popular AC4598 and AC6200 series, this design features long life, fiber brush contact technology for ultimate performance in many challenging applications.

Features


- 1/2" through-bore
- Compact 2.1" outside diameter
- Speeds up to 250 rpm continuous
- Multiple circuit configurations
- Continuous rotation of power and / or data signals
- High-impact thermoplastic construction

Benefits

- Transfers power, as well as analog and digital signals
- Compatible with data bus protocols
- Fiber brush technology provides long life and maintenance free operation
- Compact packaging

Over 6,000 designs

That's how many slip rings we've designed, so if this one's not right for your application, call us and tell us your specifications.

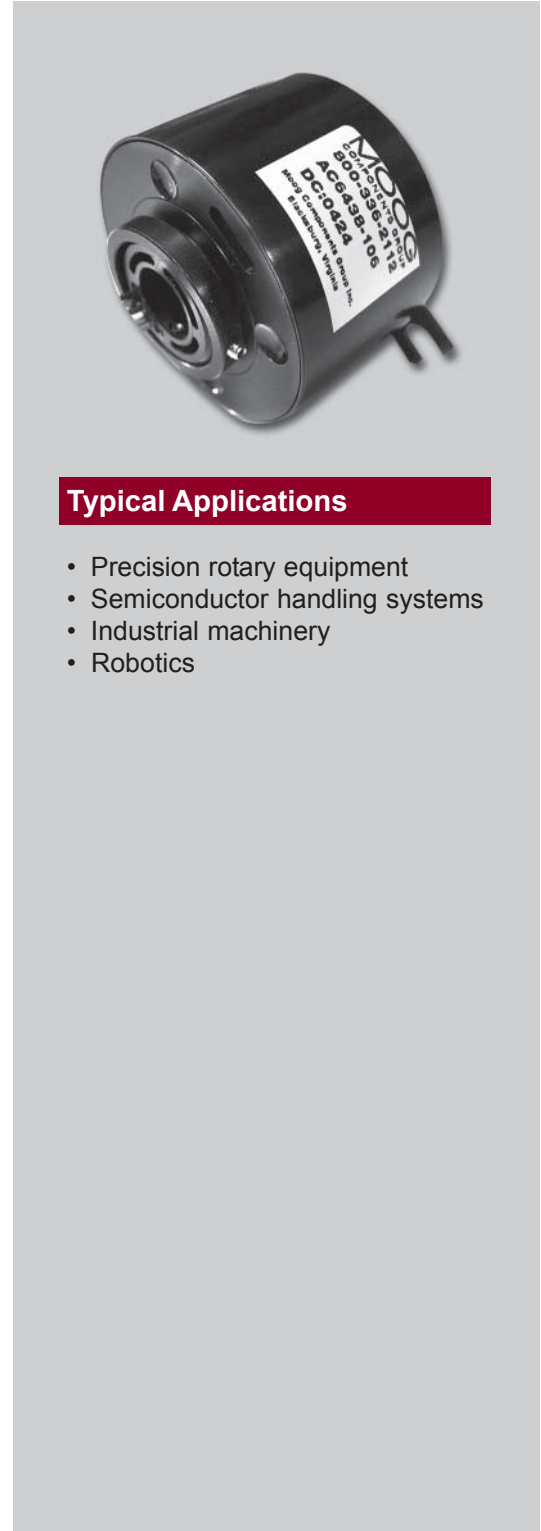

Typical Applications

- Precision rotary equipment
- Semiconductor handling systems
- Industrial machinery
- Robotics

Kontakt: Schweiz und Fürstentum Liechtenstein

Peromatic GmbH

Gubelstrasse 28
rue Confédération 29
info@peromatic.ch

CH-8050 Zürich
CH-2300 La Chaux-de-Fonds
www.peromatic.ch

Fon +41-(0)43 300 60 60
Fon +41-(0)32 927 37 20

Fax +41-(0)43 300 60 79
Fax +41-(0)32 927 37 22

Slip Rings With Through-Bores


Specifications	
Operating Speed	250 rpm*
Number of Circuits	6, 12, 18 or 24
Lead Length	12 inch standard
Voltage	250 AC / DC
Current Rating	5 amps / circuit
Lead Size / Type	22 AWG, 7 strand
Operating Temp.	80°C
Noise	Less than 60 milliohms

*Please note that the operational life of the unit is dependent upon rotational speed, environment and temperature.

Wire Color Code					
Ring #	Color	Ring #	Color	Ring #	Color
1	BLK	9	GRY	17	WHT / BLU
2	BRN	10	WHT	18	WHT / VIO
3	RED	11	WHT / BLK	19	WHT / GRY
4	ORN	12	WHT / BRN	20	WHT / BLK / BRN
5	YEL	13	WHT / RED	21	WHT / BLK / RED
6	GRN	14	WHT / ORN	22	WHT / BLK / ORN
7	BLU	15	WHT / YEL	23	WHT / BLK / YEL
8	VIO	16	WHT / GRN	24	WHT / BLK / GRN

Part Number	AC6438-6	AC6438-12	AC6438-18	AC6438-24
Dimension "A"	1.54 ± .020	2.10 ± .020	2.66 ± .020	3.21 ± .020
Dimension "B"	1.33 ± .010	1.89 ± .010	2.44 ± .010	3.00 ± .010

AC6438 Dimensions

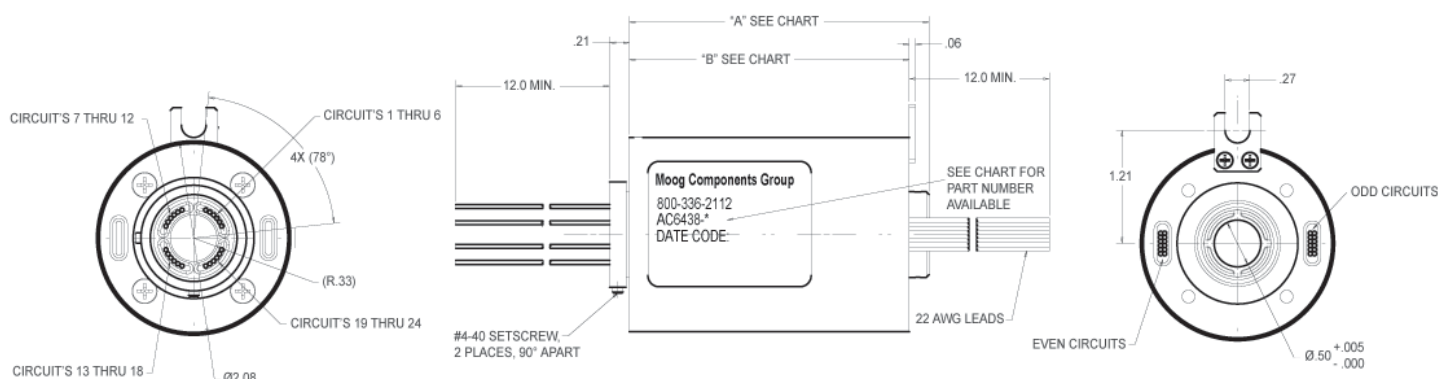

Kontakt: Schweiz und Fürstentum Liechtenstein

Peromatic GmbH

Gubelstrasse 28
 rue Confédération 29
 info@peromatic.ch

CH-8050 Zürich
 CH-2300 La Chaux-de-Fonds
 www.peromatic.ch

Fon +41-(0)43 300 60 60 Fax +41-(0)43 300 60 79
 Fon +41-(0)32 927 37 20 Fax +41-(0)32 927 37 22