

RK4288

Miniature Slip Ring Capsule Circuit configuration for commercial and military applications

Description

A slip ring capsule can be used in any electromechanical system that requires unrestrained, occasional or continuous rotation while transferring power and / or data.

Miniature slip ring capsule assemblies economically address both critical space and weight limitations. Each assembly includes the rotor, brush blocks, frame, ball bearings and dust cover.


These slip rings can be configured with spacing between rings of 0.015 inch and brush diameters no larger than a human hair. Existing designs are available or we can custom design slip rings to meet your specific requirement.

Features

- Center-to-center adjacent ring spacings as small as 0.015 inch can be obtained
- 95 rings packaged in a self-contained envelope 3.3" inches long and 1.5" inch barrel diameter
- Gold-on-gold sliding contact technology
- Up to 40 rpm operation
- Low noise; as low as 15 milliohm per circuit pair
- Long life; several million total revolutions have been obtained

Benefits

- Precise, tight packaging capabilities for meeting stringent design criteria
- Proprietary plating techniques provide improved reliability, longer life and increased efficiency
- Unique signal handling performance to minimize noise and increase speed
- Other configurations are available from 16 to 80 circuits
- We also manufacture commercial slip rings from 6 to 24 circuits

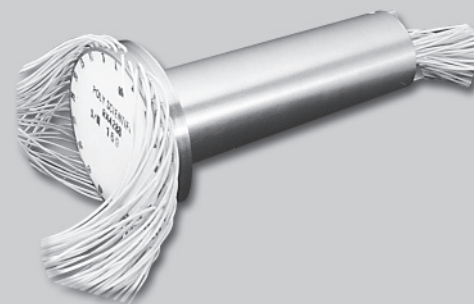

Typical Applications

This slip ring provides high speed performance and is successfully serving in applications such as:

- Gimballed pitch, roll and yaw axes of inertial navigation systems
- Satellite de-spin assemblies
- Deep earth drilling projects
- Missile weapon systems
- Unmanned aerial vehicles (UAV)
- Airborne camera platforms

Contact: Switzerland and Liechtenstein

Peromatic GmbH

Gubelstrasse 28
rue Confédération 29
info@peromatic.ch

CH-8050 Zürich
CH-2300 La Chaux-de-Fonds
www.peromatic.ch

Fon +41-(0)43 300 60 60
Fon +41-(0)32 927 37 20

Fax +41-(0)43 300 60 79
Fax +41-(0)32 927 37 22

